Detergent dispenser drawer

and emergency release

Access panel for TwinDos

Control panel

containers

Extras

Quick

Please read the separate operating instructions supplied with the appliance

Damage resulting from failure to

remove the transit bars. Failure to remove the transit bars can result in damage to the washing machine and to adjacent cabinetry or appliances. Please read the separate operating instructions supplied with the appliance.


Switching on the washing machine Press the (1) button.

The welcome screen will light up. The display will guide you through the initial commissioning process, which is divided into 6 steps.

For further information, please refer to the separate operating instructions.

This washing machine is programmed at the factory for use with cold water. If you want to use another type of water (hot water, soft water, rain water or well water), you will need to reprogramme the washing Touch the △ sensor at any time to return to machine as described in "Settings - Water intake" in the operating instructions.

Operating the washing machine

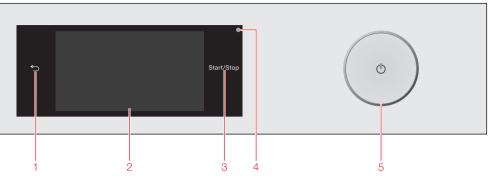

Touch display and sensor controls sensors in the display react to fingertip

The Touch display can be scratched by pointed or sharp objects, e.g. pens. Only touch the display with your fingertips.

sensor Takes vou back a level in a menu.

Touch display

Start/Stop sensor

Touching the Start/Stop sensor starts the selected programme or cancels a programme that has already been started. The sensor flashes slowly as soon as it is possible for a programme to be started and then lights up constantly after the programme has started.

Optical interface

For service technicians.

For switching the washing machine on and off. To save energy, the washing machine will switch off automatically. This occurs 15 minutes after the end of the programme/Anti-crease phase, or after being switched on if no further selection is made.

Main menu

After switching on the washing machine, the main menu will appear in the display. You access all the important sub-menus from the main menu.

the main menu. Values set previously are not saved.

Programmes

For selecting the wash programme.

☆ Favourite programmes

You can save up to 12 of your own customised wash programmes.

(1) MobileControl

With MobileControl you can operate your washing machine remotely with the Miele@mobile App.

Washing assistant

The Washing assistant guides you step by step so that you can select the optimum

Maintenance

that there are further options to choose

Settings

You can alter the washing machine's electronics to suit changing requirements in

the Settings menu.

You can scroll to the right or the left by wash programme for your laundry. swiping your finger across the screen.

Maintenance options for the TwinDos system and the Clean machine programme are located in the Maintenance menu (see "Cleaning and care").

The orange bar under the pictures shows

If there are multiple options, the selected option will be highlighted in orange.

Pull-down menu

Touch an option in the menu to select it.

Operating the touch display

Touch the top edge of the screen in the middle and drag down with your finger.

Preparing the laundry

. Preparing the laundry





The display will change to show the Overview menu. There are 3 different ways of selecting a programme.





- Sort the laundry by colour and by care label. Most garments have a textile care label in the collar or side
- Pre-treat stains and badly soiled areas (see the booklet "Miele's guide to laundry care").
- Selecting a programme
- Touch the Programme sensor.



■ Scroll to the right of the display until the programme you want appears.

■ Touch the sensor for that programme.

 Favourites 2. Washing assistant

3. MobileControl

Selecting a programme

Selecting programme settings

Selecting the temperature

■ Touch the Temperature sensor and select the temperature vou want.

Selecting a spin speed

■ Touch the Spin speed sensor and select the spin speed vou want.

Activating TwinDos

TwinDos dispensing is automatically activated for all programmes in which dispensing is possible.

- 1. Switch TwinDos on or off
- Touch the TwinDos sensor and select Off or On.
- 2. Select the detergent

When using Miele's 2-phase system you must set the colour of the laundry

If you are using a different type of detergent, this must be

- 3. Select the degree of soiling.
- Select Light, Normal or Heavy and confirm your selection with the OK sensor.

Selecting Extras

- Touch the Extras sensor.
- Select one or more Extras and confirm your selection with the OK sensor.

Activating CapDosing

- Touch the CapDosing sensor.
- Access to drain filter, drain pump Select the type of capsule you want.

- Touch the Stains sensor.
- Select the type of stains in your load from the list and confirm your selection with the OK sensor.

You can use the Timer to set the finish time or the start time for a wash programme.

4. Loading the washing machine

Opening the door



The maximum load for the programme selected will appear in the pull-down menu. The percentage of the maximum load size in the drum is shown in 25% increments. and the amount of detergent to dispense if

Closing the door

automatic dispensing is not being used.



Adding detergent

Shut the doo with a gentle swing.

There are several options for adding

Adding detergent

detergent

TwinDos


TwinDos has to be activated as described in "Before using for the first time". Activating TwinDos dispensing TwinDos dispensing is automatically activated for all programmes in which dispensing is possible. Changing TwinDos dispensing You can change the suggested colour

- composition of the laundry. Touch the TwinDos sensor and select the If you selected CapDosing when setting the programme, detergent will be dispensed via colour composition of your laundry. Deactivating TwinDos dispensing the capsule for this wash programme.
- Touch the TwinDos sensor and then touch

 Only one capsule can be selected per wash programme

Any detergent suitable for automatic front loading washing machines can be used with this appliance. Add detergent in accordance with the value in the pull-down dosage display.

Ensure that TwinDos dispensing is deactivated.



detergent drawer and add detergent to the compartments

U Detergent for the pre-wash Detergent for the main wash. including Soak if selected

capsules

6. Starting the programme-Using detergent tablets or pods

end of the programme **Always** put detergent tablets or pods directly in the drum with the laundry. They cannot be added via the detergent Starting the programme

The door will lock (A appears in the display) Using liquid detergent with a pre-wash and the programme will start.

At the end of the programme main wash if the pre-wash has been The door is still locked during the Anticrease phase and the following will appear alternately in the display:

■ Touch the flashing *Start/Stop* sensor.

Starting the programme

→ Finish/Anti-crease and Unlock with "Start/Stop"

■ Touch the Start/Stop sensor. The door will be unlocked. The door unlocks automatically at the end

of the Anti-crease phase. Pull open the door.


Three different types of capsule are ■ Remove the laundry.

- Selection Fabric care (e.g. fabric softener) from the drum. Additives (e.g. detergent enhancers)
- Detergent

Each capsule contains the correct amount for one wash cycle.

dispenser drawer.

Capsules are available to order from Miele or from the Miele online shop.



① button.

from the detergent dispenser drawer. Close the door. Otherwise there is a danger of objects being placed inadvertently in the drum. If these remain unnoticed and were washed in the next

Extras

You can use the Extras sensor to augment the wash programmes.

The programme duration is reduced. Mechanical action and energy usage A duration of between 30 minutes and 6 hours can be chosen for the

The wash temperature is reduced and the wash duration is increased in return. The wash programme continues to provide excellent results.

stages is increased. You can select by how much the water level is increased (see "Settings - Water plus level").

Check the folds

Liquid detergent cannot be used for the

Use TwinDos dispensing if you are

activating the pre-wash.

Capsules pose a health risk. The ingredients of capsules can be hazardous to health if they are swallowed

■ Switch the washing machine off with the

articles, e.g.

buttons, which

might be lodged

■ If applicable, remove the used capsule In order to reduce creasing, the laundry undergoes a smoothing process at the end of the programme. Reducing the maximum load by 50% will give a better result. Follow the instructions in the display. Small loads give a better result load, they could damage the laundry. An The garments must be suitable for drying in a tumble dryer 🖸 🖸 and open door is also a danger to pets and suitable for ironing $\implies \implies$.

For heavily soiled and stained items with protein stains

The factory default setting is 30 minutes. For hard-wearing laundry that is very

out to give a better rinse result.

For efficiently washing a very small load

Extra gentle

more gently.

This option reduces noise levels during

increased.

The laundry is not spun after the final rinse and remains in the rinse water. This helps prevent creasing if the laundry is not going to be removed from the drum immediately after the end of the programme.

Pre-wash For laundry with large amounts of dirt, e.g. dust and sand.

information.

more heat energy.

AllergoWash

are increased.

The Eco Extra helps to save energy.

The water level in the wash and rinse

Extra rinse

Check that all items have been removed

SingleWash

in the door seal (< 1 kg) in a normal wash programme. The wash duration is reduced. for any small

Please note the following advice:

Pre-ironing

- Use liquid detergent Reduce the dosage to a maximum of 50% of the amount quoted for a 1/2

Extra quiet

Water plus

An additional rinse cycle can be carried

\bigcirc and suitable for ironing \triangle \triangle .

Drum rotation and wash duration are reduced. Lightly soiled fabrics are washed

soak process. See "Settings" for more

heavily soiled. Cleaning efficiency

is increased through more intense

mechanical action and the application of

This option should be used where high

energy is used to lengthen temperature

holding times and more water is used to

increase rinsing efficiency. The items must

be suitable for drying in a tumble dryer 🖸

standards of hygiene are required. More

the wash programme. Use this if you want to wash during guiet periods (for instance, when children are sleeping). The final spin is automatically reduced to (Rinse hold). The programme duration is

Rinse hold

Excessive foam has built up during washing.

■ Check the amount of detergent dispensed.

the degree of soiling of the laundry.

machine" programme. up in the machine, run the Clean machine programme using

i Align the washing The Pre-ironing Extra which runs at the end of the programme

Only a few more washes The detergent in the cartridge is running low. There are

② has not been used for a long time.

"TwinDos" Maintenance | TwinDos or automatic dispensing via compartment 1) and/

for compartment ① or ② has not been used for a long time. It is possible that

"Maintenance" menu.

Carry out the TwinDos maintenance programme

"Maintenance" menu.

Carry out the TwinDos maintenance programme as

Use TwinDos for one of your next loads.

Miele IntenseClean or powder detergent.

amount set.

run for a long time.

possible before a new between 4 and 8 wash cycles remaining.

cartridge is needed for Order a new cartridge.

machine. Laundry not could not be carried out properly.

■ With automatic detergent dispensing, check the dosage

Observe the instructions on the detergent packaging and

■ If necessary, reduce the dosage amount by increments of

A programme using a temperature above 60°C has not been

■ In order to prevent bacteria and unpleasant odours building

■ Check whether the washing machine is aligned correctly

If the fault message appears again, contact Miele. The

as described in "Installation and connection – Levelling the

■ Check whether the maximum delivery head of 1 m has been

washing machine can still be used, however without the Pre-

TwinDos or automatic dispensing via compartment ① and/or

described in "Cleaning and care - TwinDos maintenance".

immediately as described in "Cleaning and care - TwinDos

Check detergent

Hvaiene info: Select

compartment 1.

Use "TwinDos" or

carry out "TwinDos"

Maintenance in the

See the operating

more information.

See the operating

more information.

instruction manual for maintenance".

instruction manual for

"Maintenance" and

Programme chart

Programme	Load (III kg)	ierriperature	IGHIS	
Cottons Cottons	0.0	Cold to 90°C	Cottons, linens or cotton mix fabrics, e.g. table linen, towelling, underwear, T-shirts etc.	(A) (B) (C) (B) (B) (B) (B) (B) (B) (B) (B) (B) (B
Minimum iron	0.74	Cold to 60°C	Synthetic, mixed fibre and easy care cotton.	
Delicates	3.0	Cold to 60°C	Delicate garments made from synthetic fibre, mixed fibre, rayon and viscose.	
QuickPowerWash	5.0	40°C – 60°C	Moderately soiled garments which are also suitable for washing in the Cottons programme.	(A) (F) (M)
Automatic plus	0.9	Cold to 40°C	Mixed loads of garments sorted according to colour which are suitable for the Cottons and Minimum iron programmes.	A B C D E F G H J K L M
Woollens ∰	2.0	Cold to 40°C	Machine-washable or hand-washable wool or wool blend fabric. If the care label does not specify a temperature, wash using the cold setting.	E C W
Silks 🐿	1.0	Cold to 30°C	Silks and other handwashable fabrics with no wool content, e.g. satin, lace and silk.	
Express 20	3.5	Cold to 40°C	Cotton garments that have hardly been wom or are only very lightly soiled.	A F M
Shirts	1.0/2.0	Cold to 60°C	Shirts and blouses made of cotton and mixed fibre. If the preset <i>Pre-ironing</i> Extra is switched off, the maximum load capacity is increased to 2.0 kg.	
Denim	3.0	Cold to 60°C	Items made of denim.	ABCDEFG HJKLM
Dark garments	3.0	Cold to 60°C	Black and dark items made of cotton or mixed fibres.	
Sportswear	3.0	Cold to 60°C	Sportswear such as jersey shirts and leggings, and microfibre and fleece garments.	(A) (B) (B) (B) (B) (B) (B) (B) (B) (B) (B
Trainers	2 pairs	Cold to 40°C	Sport shoes only (not leather shoes).	
Outerwear	2.5	Cold to 40°C	Performance outerwear (e.g. jackets and trousers) made from membrane fabric such as Gore-Tex®, SYMPATEX®, WINDSTOPPER® etc.	A B C D G H
Proofing	2.5	40°C	Treating microfibre fabric, skiwear and table linen made from mainly synthetic fibres to provide a water and dirt resistant finish.	3
Down Items	2.0	Cold to 60°C	Jackets, sleeping bags, pillows and other down-filled items.	A B C D G J K
Down duvets	2.5	Cold to 60°C	Quilts, duvets and pillows with feather or down filling.	ABC0GJK
Pillows	2.0	Cold to 60°C	Synthetic filled washable pillows.	A B C D G J K L M
Cottons hygiene	0.0	60°C to 90°C	Cotton or linen fabrics with direct skin contact or for which special hygiene requirements apply.	A B C D F G H
Curtains	2.0	Cold to 40°C	Curtains, including net curtains, specified as machine-washable by the manufacturer.	A B C D F G J
First wash	3.0	Cold to 40°C	New items made of cotton, towelling and polyester fabric.	CDEFKLM
Separate rinse	8.0	I	For rinsing items washed by hand.	©(M)
Starch	8.0	I	Starching table cloths, serviettes and workwear.	(S) (O)
Freshen up	1.0	1	Dry, clean cotton, linen or mixed fibre garments which are slightly creased.	
Steam care	2.0	Γ	Reduces the amount of creasing in damp, freshly washed and spun cotton or linen garments.	
Drain/Spin	8.0	I	Drain only: Select 0 rpm for the spin speed.	
Clean machine	No load	82°C	With frequent washing at low temperatures there is a danger of a build-up of bacteria in the washing machine. Cleaning the washing machine will significantly reduce bacteria, mould, and biofilm, and prevent the build-up of unpleasant odours.	

Deteraent

Miele recommended detergents

recommended de	elergenis				Cleaning the de
	Miele				drawer
	UltraPhase	Miele	Miele	Miele	Washing at low t
rammes	1/2	Cap ()	Cap 🛞	Cap 🙆	of liquid deterger
tons	✓	-	(D)	E	of mould and ba dispenser drawe
mum iron	✓	_	(D)	E	
cates	✓	©	D	_	Clean the entire intervals for hyg
ckPowerWash	✓	_	-	_	are using the T
omatic plus	✓	_	(D)	E	
ollens 🔟	_	©	-	_	
s two	-	©	-	_	0.0.
ress 20	✓	_	D	_	
ts	✓	-	D	Œ	
im	✓	_	D	_	■ Press down the
k garments	✓	_	D	_	the same time, the machine.
rtswear	_	(A)	-	_	■ Clean the deter
ners	✓	_	-	Œ	with warm water
ın Items	_	B	_	_	Cleaning the sig
n duvets	-	В	-	-	softener channe
ws	✓	_	-	_	
tains	✓	-	-	Œ	
t wash	✓	_	(D)	_	
arate rinse	_	_	(D)	_	2-

 $\sqrt{\ }$ = recommended; – = not recommended

(A) = Sport; (B) = Down items; (C) = WoolCare; (D) = Fabric Softener; (E) = Booster

Cleaning and care

Cleaning the detergent dispenser

Washing at low temperatures and the use of liquid detergent can lead to a build-up of mould and bacteria in the detergent dispenser drawer.

Clean the entire drawer at regular intervals for hygiene reasons, even if you are using the TwinDos system exclusively.



Press down the release button and, at the same time, pull the drawer right out of

dispenser drawer

Clean the detergent dispenser drawer with warm water.

Cleaning the siphon and the fabric oftener channel



out of the compartment and clean it under warm running water

softener channel

using a brush

Clean the siphon tube in the same way. Refit the siphon.

to become clogged. Make sure that

you clean the siphon and siphon tube


particularly thoroughly after using liquid



starch a few times.

and warm water. ⚠ Liquid starch can cause the siphon

Cleaning the detergent dispenser drawer housing



■ Use a bottle brush to remove detergent residues and limescale from the jets inside the detergent dispenser drawer

Cleaning the TwinDos system

Damage resulting from dried washing

If the system has not been used for a long time (more than two months), the detergent in the hoses can become viscous or dry out. The hoses can become blocked and would then need to be cleaned by a service technician. Clean the TwinDos system.

container is required (sold separately),

Some of the messages in the display are more than one line long. Touch the ∨ or ∧ sensor

lessage	Possible cause and remedy
he display remains	There is no power to the machine.
ark and the Start/Stop	■ Check whether the mains plug is plugged in and switched
ensor indicator light	on.
oes not come on.	■ Check whether the circuit breaker has tripped.
	The washing machine has switched off automatically to save

1 Door will not lock. Call The door is not closed properly. The door lock could not Close the door again.

again, contact Miele Water drainage fault. The water outlet is blocked or restricted. The drain hose has

Problem solving guide

To clean the system, a refillable TwinDos available online at shop.miele.com.

to read them in full.

lessage	Possible cause and remedy
he display remains ark and the Start/Stop ensor indicator light oes not come on.	 There is no power to the machine. Check whether the mains plug is plugged i on. Check whether the circuit breaker has tripped in the circuit breaker has tripped in
	The washing machine has switched off auton energy. Switch it back on with the button.

■ Start the programme again. If the fault message appears

Clean the drain filter and been fixed too high. the pump. Check the Clean the drain filter and the drain pump.

■ Check whether the maximum delivery head of 1 m has been Water intake fault. Turn The water inlet is blocked or restricted. Check whether the tap is turned on properly. ■ Check whether the inlet hose is kinked.

Check whether there is sufficient water pressure. The filter in the water inlet is blocked. Clean the filter (see the operating instructions). Waterproof system The water protection system has reacted. activated. Turn off the Turn off the tap.

tap. Call Miele. Call Miele. \ /!\ Fault F

There is a fault. If restart fails, call Miele. Disconnect the washing machine from the mains electricity supply, either by switching it off at the wall socket and

withdrawing the plug, or by disconnecting it at the circuit ■ Wait at least 2 minutes before reconnecting the washing machine to the mains electricity supply.

■ Then switch the washing machine on again. Restart the programme.

If the fault message appears again, contact Miele. ↑ The door lock is The door lock is jammed. jammed. Call Miele.

> The messages will appear at the end of the programme and when the washing machine is switched on and need to be confirmed with the OK sensor.

must be started in the detergent has dried inside the hoses.

Quick Start Guide Washing machine

Miele

These short instructions are not a substitute for the operating instructions supplied with the appliance. Please read the operating instructions supplied with your washing machine before using it for the first time and take note of the Warning and Safety instructions, as well as the full descriptions on how to use your appliance.

en - AU, NZ

M.-Nr. 11 016 640